

LO RISER

TM

INCLINING PLATFORM TRAILER

- 6,000, 10,000, 12,000, 14,000 and 16,000 lb Capacities
- 4° and 5° Load Angles
- Single and Dual Axle Models
- Bolt-on Hitchball or Pintle Hitch
- 4 Position Hitch Height Adjustment

STOP, DROP AND LOAD

GROUND HEIGHT



®

LO RISER TRAILERS

FEATURES, SPECIFICATIONS & OPTIONS

| Model | GVWR | Capacity | Trailer Length | Deck Length | Deck Width | No. of Wheels | Load Angle |
|----------|-----------|-----------|----------------|-------------|------------|---------------|------------|
| IPT2-311 | 8100 lbs | 6000 lbs | 16 ft 3 in | 11 ft 4 in | 6 ft 2 in | 2 | 5° |
| IPT4-516 | 13400 lbs | 10000 lbs | 22 ft 1 in | 16 ft | 6 ft 2 in | 4 | 4° |
| IPT4-616 | 15400 lbs | 12000 lbs | 22 ft 1 in | 16 ft | 6 ft 2 in | 4 | 4° |
| IPT4-716 | 17550 lbs | 14000 lbs | 22 ft 1 in | 16 ft | 6 ft 2 in | 4 | 4° |
| IPT4-816 | 19850 lbs | 16000 lbs | 22 ft 1 in | 16 ft | 6 ft 2 in | 4 | 4° |


Standard Equipment:

- Electric Brakes on Each Wheel
- 2 Pin + 12 VDC and Ground
- Control Switch with Cable
- Max 4 to 1 Payload to Trailer Weight
- HSLA Steel Construction
- LED Lighting with 7 Pin Connector
- Built-in Ramp
- Adjustable Hitchball 2 5/16" Diameter
- "D" Ring Tie-Downs
- Built-in Tie-Down Rail
- Diamond Plate Flooring
- Standard Breakaway Kit with Chains
- Radial Tires
- Rubber Over Hydraulic Suspension
- Xtra-Large, Lockable Storage Compartment
- True Blue Paint

Options:

- Cargo Winch
- On Board Battery with Charger & Maintainer
- Paint Color
- Pintle Hitch
- Aluminum Wheels (*IPT2-311, IPT4-516 & IPT4-616 only*)
- Spare Tire and Wheel with Carrier
- Star Traction Flooring

Call for Details.

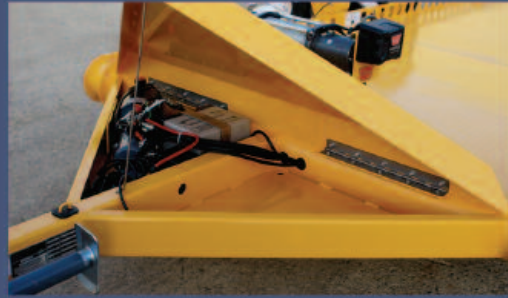

Equipped with an Xtra-large, lockable storage compartment, the Lo Riser offers maximum storage capacity.



A flip of a switch hydraulically lowers the deck to ground height to allow fast, drive-on access.



When lowered, the Lo Riser allows a minimum 4° and 5° angle ideal for low ground clearance or reduced gradeability vehicles.



The Lo Riser can be equipped with optional Star Traction Flooring and a removable stop / brace.

Manufactured by:

ADVANCE
METALWORKING CO., INC.

P.O. Box 465 • 3726 HWY 34 • Kewanee, Illinois 61443 • Tel: 309.853.3387 • Toll Free: 800.369.5365 • Fax: 309.853.3389 • www.advancemetalworking.com

Technical modifications reserved. Materials and specifications subject to change without notification. Machines may be shown with options. Form 103F-1/12